



PRECISION REEL MOWERS

COMMERCIAL QUALITY • PROFESSIONAL RESULTS

GIVE YOUR LAWN
A GOLF COURSE
QUALITY CUT

RL20H CLASSIC SERIES 20" 5 or 7 Blade

VERSION>>	STANDARD	HIGH-CUT
Models	RL207H	RL205HC RL207HC
Total Height of Cut Range	7/16" to 1-3/4" (11mm to 47.5mm)	5/8" to 2-1/4" (16mm to 57mm)
Optimum Height of Cut Range	7/16" to 1-1/4" (11mm to 35mm)	1-1/4" to 2-1/4" (32mm to 57mm)



POWERED by HONDA™
GX120 / GX160

- 122cc 3.2 HP / 163cc 4.8 HP
- Overhead Valves
- Cast Iron Cylinder Sleeve
- Low Oil Alert Shutdown

OPTIONAL ENGINE




BRIGGS & STRATTON
XR PROFESSIONAL 3.5 Engine

- Overhead Valves
- Cast Iron Cylinder Sleeve
- Forged Crankshaft

OPTIONAL FRONT ROLLERS



GROOVED



SMOOTH

Since 1935, California Trimmer mowers have been manufactured with the commitment to produce the best power reel mower available.

California Trimmer reel mowers will provide you with a healthy lawn that has the look of a finely manicured golf green. Rotary mowers tear and rip the grass removing nutrients resulting in brown spots, rough growth and thatch.



Reel mowers make very clean, sharp cuts, like a pair of scissors. When grass is cut in a clean, smooth manner, moisture and nutrients are locked in promoting healthy growth and less maintenance.





CONVENIENT CLUTCH SYSTEM

A simple hand lever controls the smooth engagement of the durable belt / chain drive which provides direct and variable speed mowing for every type of operating condition.

SUPERIOR CUTTING ACTION

Our reel and cutter bar are made of heat-treated high carbon steel for sharper blades and a longer lasting cut that provides beautiful results and improves overall lawn health.

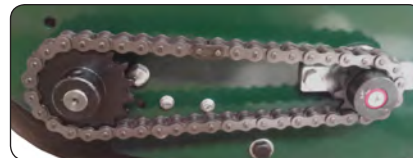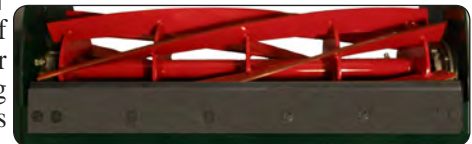


HEAVY-DUTY DRIVE SYSTEMS

The main axle and reel blade shafts are supported by full-sized ball bearings and are driven by large chains and heat-treated sprockets.

9" DEEP TREAD DRIVE ROLLER

The extra-wide and grip textured surface area provides solid traction to effectively propel the mower while protecting the grass.



EXTRA-LARGE GRASS CATCHER










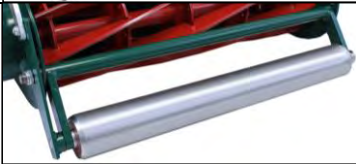





A capacity of up to 2 bushels (70 liters) reduces emptying stops and starts. Made from durable high-density polyethylene, their simple and convenient mounting method provides easy access and removal.

LIMITED
WARRANTY
COVERAGE

Reel Mower Chassis / Frame: 2-years residential / 1-year commercial
Briggs & Stratton XR550 / XR3.5 Engine: 2-years residential & commercial
Honda GX120 / GX160 Engine: 3-years all applications



20" CLASSIC REEL MOWER LINE-UP & KEY OPTIONS

<p>All units come standard with a large capacity high-density polyethylene grass catcher</p> 				
<p>MODELS>>></p>	<p>RL205HC BS550</p>	<p>RL205HC GX120 / GX160</p>	<p>RL207H/HC/HR/HRG BS550</p>	<p>RL207H/HC/HR/HRG GX120 / GX160</p>
<p>CUTTING BLADE</p>	<p>5-Blade</p> 		<p>7-Blade</p> 	
<p>Heavy steel welded, computer balanced, thick thermal bonded paint finish, and a machine ground edge with a relief angle. The 5-blade is typically for cool season grass lawns to be maintained a 1-1/4" to 2-1/4" while the 7-blade is for grass mowed at 1-1/4" and below. Also, there will need to be more frequent mowing with the 7-blade as there are more cutting edges with less spacing to gather and shear taller grass.</p>				
<p>CUTTING HEIGHT RANGE</p>			<p>Standard (H Models) Total: 7/16" - 1-3/4" Optimum: 1-1/4" and Below</p>	<p>High-Cut (HC Models) Total: 5/8" - 2-1/4" Optimum: 1-1/4" and Above</p>
<p>FRONT WHEELS</p>		<p>Installed on H & HC Models</p> <p>Made of solid high-density polyethylene, mounted with 3/8" bolts and supported by large caged roller bearings with grease fittings.</p>		
<p>SMOOTH FRONT ROLLER</p>		<p>Optional on H & HC Models / Standard on HR Models</p> <p>Provides a level cut and helps prevent scalping. Recommended for soft ground conditions and at cutting heights of 1-1/4" or lower on dense grass. Made of thick steel tubing with surface plating, mounted with a 1/2" solid steel axle and supported by large sealed ball bearings.</p>		
<p>GROOVED 2-SECTION FRONT ROLLER</p>		<p>Optional on H & HC Models / Standard on HRG Models</p> <p>Provides a level cut, straight stracking and helps prevent scalping. Recommended for firm ground conditions and grass heights up to 2". Made of thick steel tubing with surface plating, 32 x narrow rounded groove ridges, mounted with a 1/2" solid steel axle and supported by large sealed ball bearings.</p>		
<p>ENGINE</p>	 <p>POWERED BY BRIGGS & STRATTON</p> <p>XR3.5 Professional 127cc / OHV / 3.5 HP 2-Year Residential & Commercial Warranty</p>	 <p>POWERED BY HONDA</p> <p>GX120 Commercial 122cc / OHV / 43.2 HP 3-Year Residential & Commercial Warranty</p>	 <p>POWERED BY HONDA</p> <p>GX160 Commercial 163cc / OHV / 4.8 HP 3-Year Residential & Commercial Warranty</p>	 <p>POWERED BY HONDA</p> <p>GX160 Commercial 163cc / OHV / 4.8 HP 3-Year Residential & Commercial Warranty</p>